

# HOFMANN®



**monty™ Universal 2**

**LEVER-LESS TIRE CHANGER**

**NEW!**

## HOFMANN *monty*™ UNIVERSAL 2

The innovative minds at Hofmann have designed a “lever-less” tire changer to meet the ever changing demands of tire shops, automotive garages, car dealerships and specialty shops. The Hofmann *monty Universal 2* provides precision movement of the specially designed laser-guided demount tool. Additional standard labor-saving features included on the *monty Universal 2* are: “Zip-Lock” center clamping of the wheel, integrated wheel lift, dual-position disc-style bead breaker, pneumatic bead assist, two-speed drive system and top-side bead inflation.



### Wheel Lift



- Designed to assist technician and reduce fatigue.
- Reduces the chance of damaging expensive wheels.

## “Zip-Lock” Center Clamping



- Patented wheel clamping system is fast and easy.
- Protective table and centering cones reduce the chance of wheel damage.
- Adjustable working height is perfect for any size tire or technician.


## Dual-Position Disc Bead Breaker



Operator control panel.




Polymer disc won't damage wheels or tire sensors.

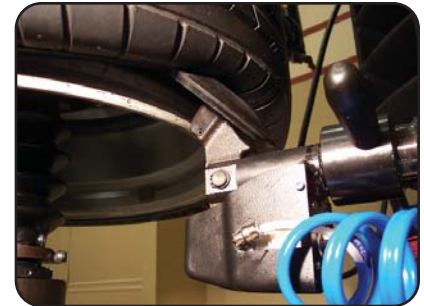

Locking disc position is quick and accurate on both sides of tire.

## Laser-Guided Demount Tool

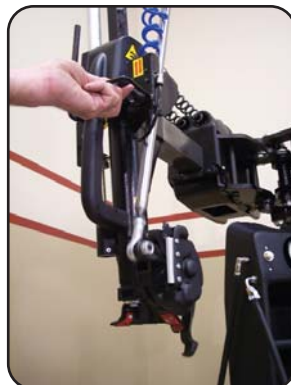

- Foot pedal control swings demount tool into position.
- Laser guides technician to ensure proper position of demount tool.
- Simple control inserts the demount tool between the wheel flange and tire.
- Bead is lifted over the wheel flange effortlessly.



**monty™**  
**Universal 2**



**Pneumatic Bead Assist**



- Maintains top bead in drop-center on difficult performance wheels.
- Reduces the chance of top bead damage.
- Allows one technician to change any wheel.

**Two-Speed Drive System**



- Foot pedal motor control system delivers the right torque and speed.
- Two speeds: Low speed with high torque, and fast speed with less torque

**Top-Side Bead Inflation**



- No need to demount wheel from tire changer.
- Inflates difficult wheels quickly and easily.

**Specifications**

Wheel Diameter Range	12" - 30"
Max. Tire Diameter	47"
Max. Wheel Width	17"
Max. Wheel Weight	154 lbs.
Work Area Dimensions (D x W x H)	69" x 67" x 81"
Shipping Weight	770 lbs.
Air Requirements	110 - 170 PSI
Power Requirements*	120V, 1Ph, 60Hz

**Optional Accessories**

Reverse-mounted wheel kit	EAA0358G58A
Light-truck wheel kit	EAA0349G06A

For more information on the *monty Universal 2*, standard or optional accessories, contact a Local Sales Representative or visit our web site.



**USA**

309 Exchange Avenue • Conway, AR 72032  
(800) 251-4500 • (501) 505-2662  
Fax (501) 450-2085 • [www.hofmann-usa.com](http://www.hofmann-usa.com)

**Canada**

6500 Millcreek Drive • Mississauga, ONT L5N 2W6  
(800) 267-2185  
Fax (905) 821-2073 • [www.hofmann.ca](http://www.hofmann.ca)